

Specifications


RESPONSE

Frequency Response (-10 dB).	35 - 170 Hz.
Frequency Range with Preset.	35 - 80 Hz.
Nominal Impedance.	4 Ohms.
Power AES.	2.800 W.
Program Power.	5.600 W.
Máx. SPL (dB SPL @ 1 m.).	138 / 144.
Transducers LF.	2 x 18".

ENCLOSURE


Dimensions.	94 x 54 x 72 cm.
Net Weight.	70 kg.
Finish painted.	Warnex ® Black.
Grill perforate steel.	Foam backed.
Connectors.	2 NL4.
Rigging.	No.
Handles.	Two in side.
Floor stand.	No.
Mounting pole cup.	No.

Photo

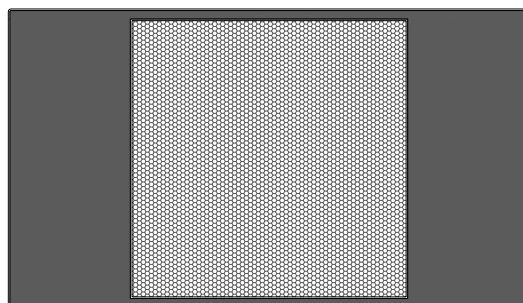

Cad.


Front.

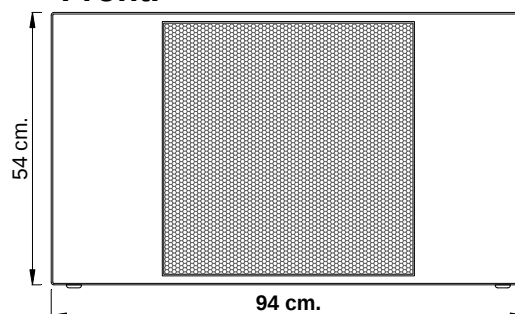

Zenithal.



Lateral.

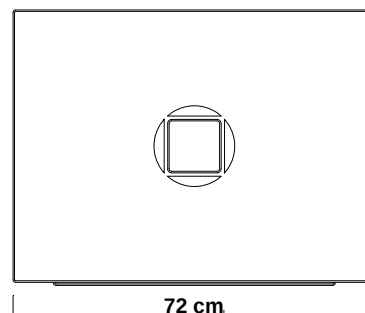

Aplicaciones / Applications

La pantalla acústica **SB-218** monta dos altavoces de 18 pulgadas.

Por sus características técnicas, dimensiones y peso, se convierte en un sistema funcional y polivalente, pudiendo apoyar como refuerzo de subgraves a cualquier tipo de configuración, ya sea grande o pequeña.

Esta unidad monta patines en la parte inferior y alojamiento de los mismos en la parte superior para su apilamiento.

Recinto acústico rectangular construido en tablero contrachapado de abedul fenólico de 18mm. de espesor, reforzado en las partes más críticas.

Mueble acabado en pintura Warnex ® negra y rejilla frontal de protección.

Unit **SB-218** two speakers mounted 18 inches.

Its dimensions, weight and technical characteristics turns the **SB-218** into a very operative unit, suitable as bass reinforcement of any kind of sound system configuration.

The **SB-218** enclosure has built in fittings that allows piling up in vertical up to 4 units.

The enclosure is built in phenol resin waterproof birch plywood of 18 mm, reinforced in the critical points.

Black WARNEX coating and outer steel grill.

